


19 x 7

Minimum breaking force factor: 0.328
Nominal rope length mass factor: 0.401

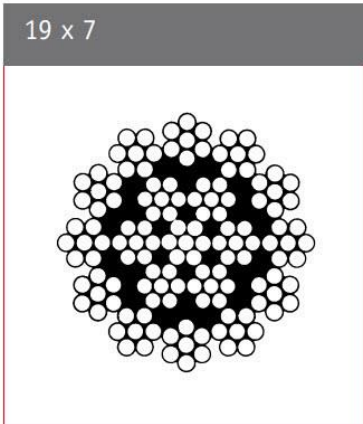

Nominal Diameter	Weight 100 m	Minimum Breaking Load 1,770 N/mm ²		Minimum Breaking Load 1,960 N/mm ²	
		mm	kg	kN	kg
4	6.40	9.30	950	10.30	1,050
5	10.00	14.50	1,480	16.10	1,640
6	14.40	20.90	2,130	23.10	2,360
7	19.70	28.50	2,900	31.50	3,210
8	25.70	37.20	3,790	41.10	4,200
9	32.50	47.00	4,800	52.10	5,310
10	40.10	58.10	5,920	64.30	6,560
11	48.50	70.30	7,160	77.80	7,930
12	57.70	84.00	8,530	92.60	9,440
13	67.80	98.00	10,000	108.70	11,100
14	79.00	114.00	11,600	126.00	12,900
15	90.00	131.00	13,300	145.00	14,800
16	103.00	149.00	15,200	165.00	16,800
18	130.00	188.00	19,200	208.00	21,200
19	145.00	210.00	21,400	232.00	23,700
20	160.00	232.00	23,700	257.00	26,200
22	194.00	281.00	28,700	311.00	31,700
24	231.00	334.00	34,100	370.00	37,800
26	271.00	392.00	40,000	435.00	44,300
28	314.00	455.00	46,400	504.00	51,400